

## Ex foot switches


Ex GF 1Ö/1S - 3m

Material number: 1048461

### Features/Options:

- Ex zone 1 and 21
- 1-pedal type
- Metal enclosure

### Dimensions

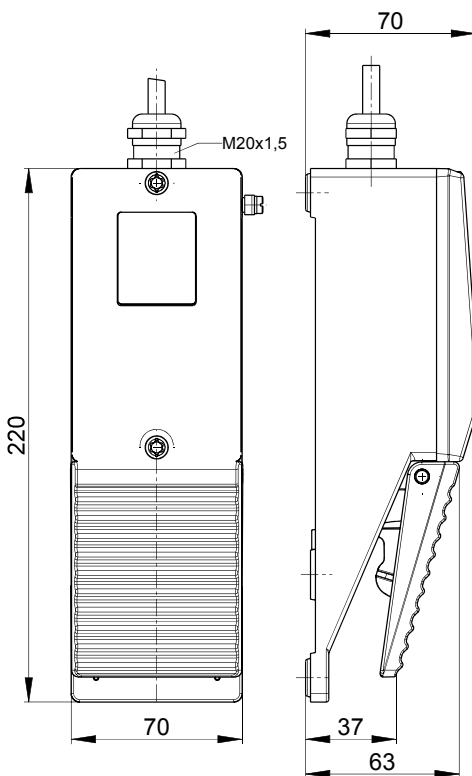

- Low pedal height
- With pre-wired cable, cable length 3 m
- N.B.: Please state required international approvals with your order!

### Technical data

Standards	EN 60947-5-1; EN 60079-0, EN 60079-1, EN 60079-31; EN ISO 13849-1
Enclosure	aluminium die-cast, powder-coated
Cover	glass-fibre reinforced, shock-proof thermoplastic (PA 66), self-extinguishing UL 94-V0
Pedal	glass-fibre reinforced, shock-proof thermoplastic (PA 66), self-extinguishing UL 94-V0
Connection	pre-wired cable H05VV-F
Cable cross-section	4 x 0.75 mm <sup>2</sup> (incl. conductor ferrules)
Cable length	3 m
Contact material	silver
Degree of protection	IP 65 to IEC/EN 60529
Switching system	slow action, positive break NC contacts ⊖
Switching elements	1 NC/1 NO contact, type Zb
Switch insert	Ex 14
B <sub>10d</sub> (10 % load)	2 million
T <sub>M</sub>	max. 20 years
Utilisation category	AC-15; DC-13
I <sub>e</sub> /U <sub>e</sub>	6 A/250 VAC; 0.25 A/230 VDC
Max. fuse rating	6 A gG/gN fuse
Ambient temperature	T6: -20 °C ... +60 °C, T5: -20 °C ... +75 °C
Mechanical life	> 1 million operations
Impact energy	max. 7 J



## Ex foot switches

Ex GF 1Ö/1S - 3m

Material number: 1048461 (Material number old: 81101201)

### Technical data

#### Ex marking

⊕ II 2G Ex d IIC T6/T5 Gb,  
⊕ II 2D Ex tb IIIC  
T80 °C/T95 °C Db IP65  
IECEX Ex d IIC T6/T5 Gb,  
Ex tb IIIC T80 °C/T95 °C Db IP65

#### Approvals


PTB 11 ATEX 1002 X  
IECEX PTB 11.0090X



#### Weight

880 g

### Contact diagram

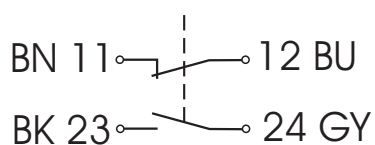

### Switching diagram

